


Bullseye Lifting "sling"

The sling from Cape Cod Shipbuilding has one small wire running to the aft cleat or main sheet block and two to the chain plates for a total of four mounting points.

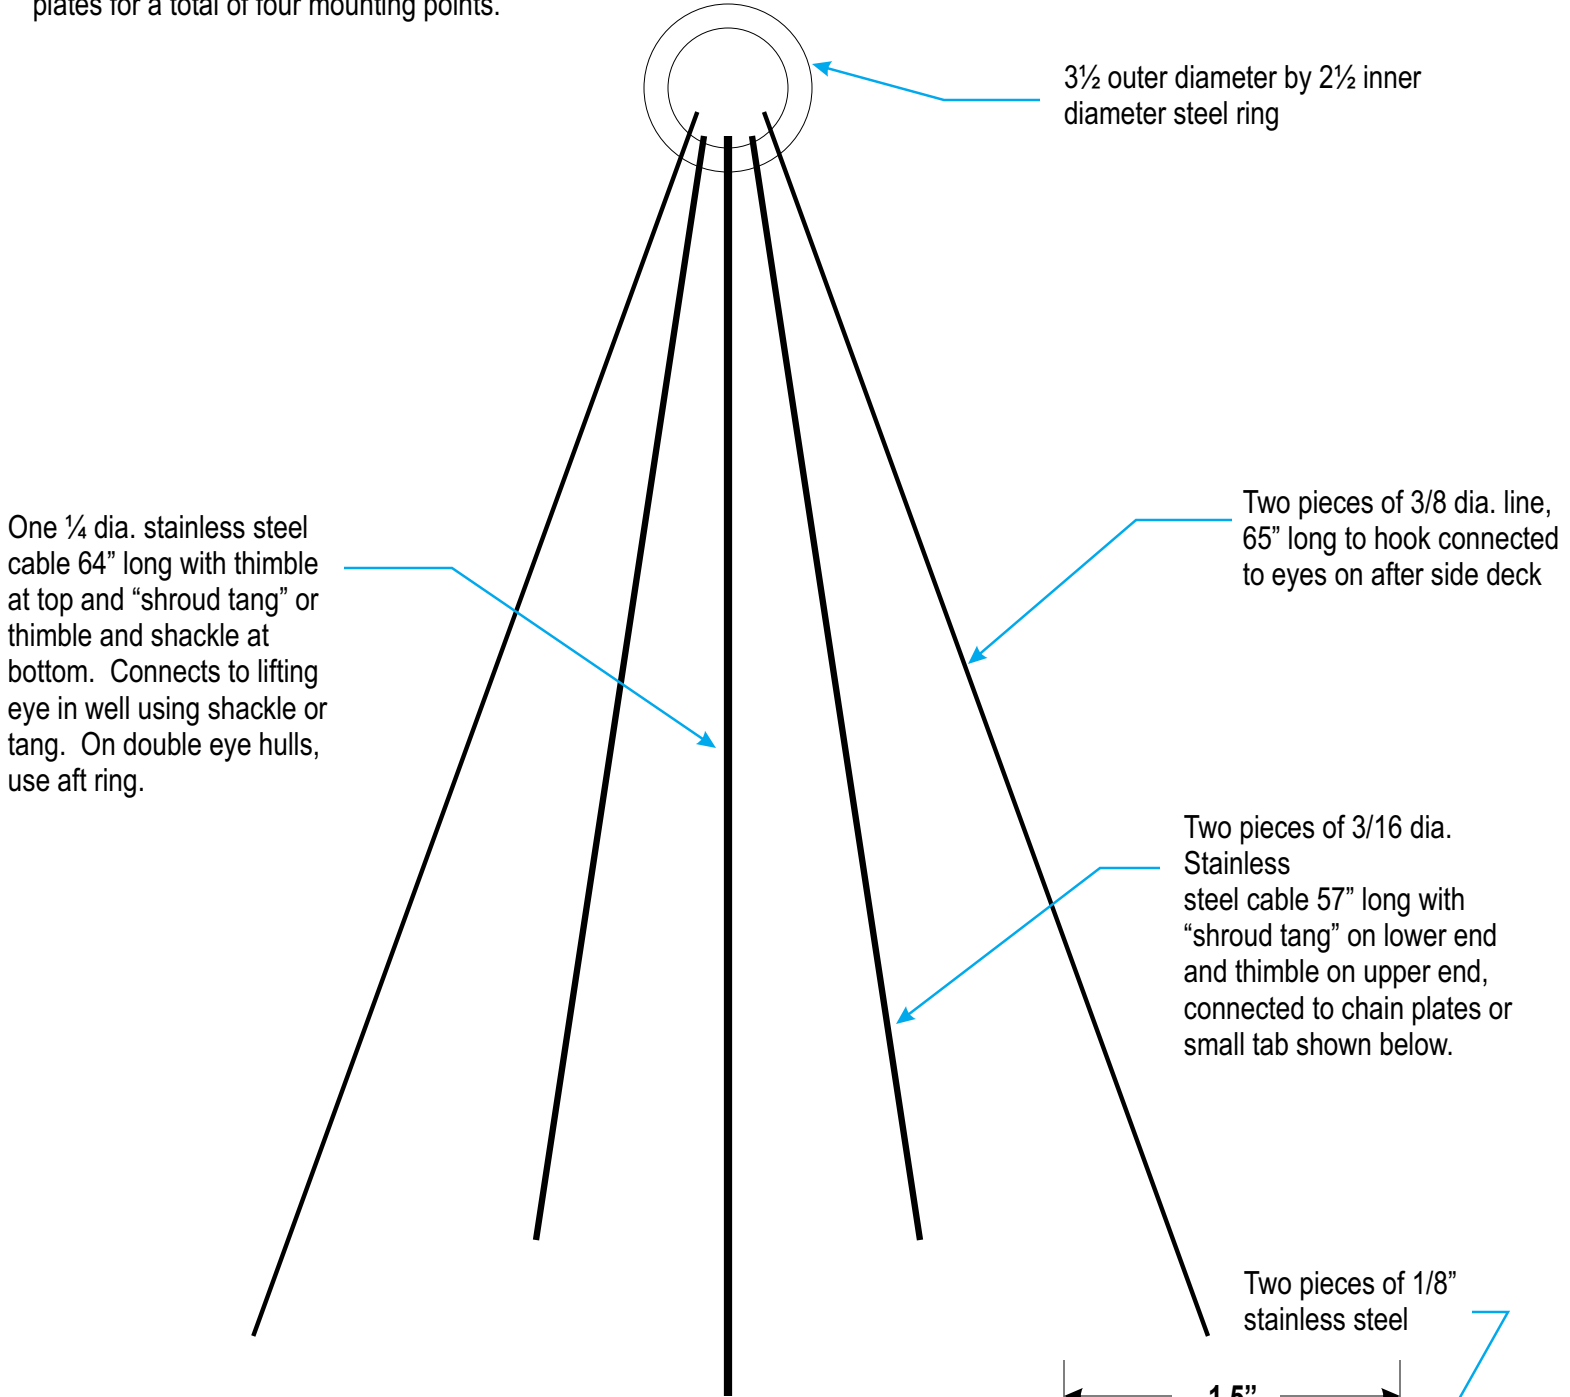

One 1/4 dia. stainless steel cable 64" long with thimble at top and "shroud tang" or thimble and shackle at bottom. Connects to lifting eye in well using shackle or tang. On double eye hulls, use aft ring.

3 1/2 outer diameter by 2 1/2 inner diameter steel ring


Two pieces of 3/8 dia. line, 65" long to hook connected to eyes on after side deck

Two pieces of 3/16 dia. Stainless steel cable 57" long with "shroud tang" on lower end and thimble on upper end, connected to chain plates or small tab shown below.

Two pieces of 1/8" stainless steel

All dimensions are from center of thimble to center of "tang" or center of each fastening point.

Attach to clevis pin (or bolt) of 3/16 side cables.

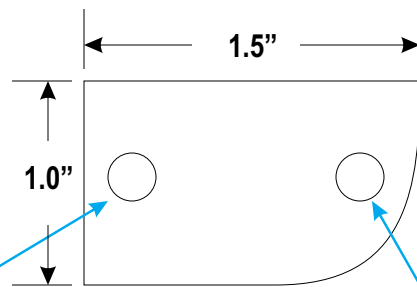

Attach to clevis pin on chain plate. Can also be mounted between shroud tang and chain plate for launching with the mast stepped.